

Dehumidifier Frigosorb **F-31**




Dehumidifying capacity at 20°C / 60%RH

1,1 kg/h

Dry air flow


400 m³/h

- Washable rotor
- Continuous operation also at dewpoints
- Stainless steel chassis
- Only condensation, no wet air
- Low energy consumption

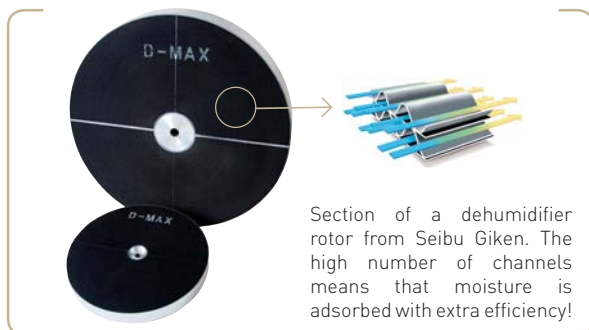

TECHNICAL DATA


Dehumidifier model	F-31
Nominal capacity ¹ (kg/h)	1,1
Dry airflow ² (m ³ /h)	400
Compressor Power	3,2A / 710W
Maximum electric consumption	4,3A / 970W
Supply fuse 230V / 50Hz, (A)	6
Weight (kg)	45

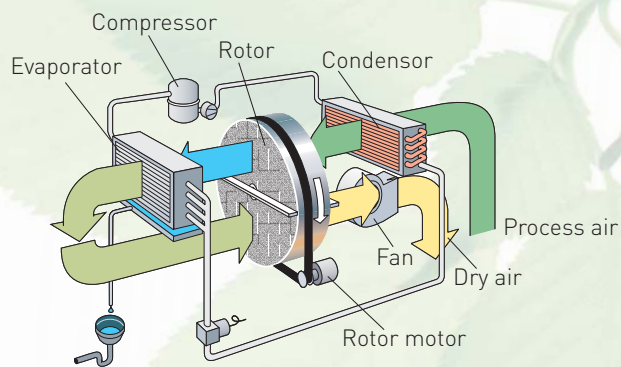


¹ Valid for inlet conditions 20°C/60%RH. For other inlet conditions the capacity can be calculated by using the diagram below.

² Volume flow for density 1.20 kg/m³. Free blowing

CORRECTION DIAGRAM

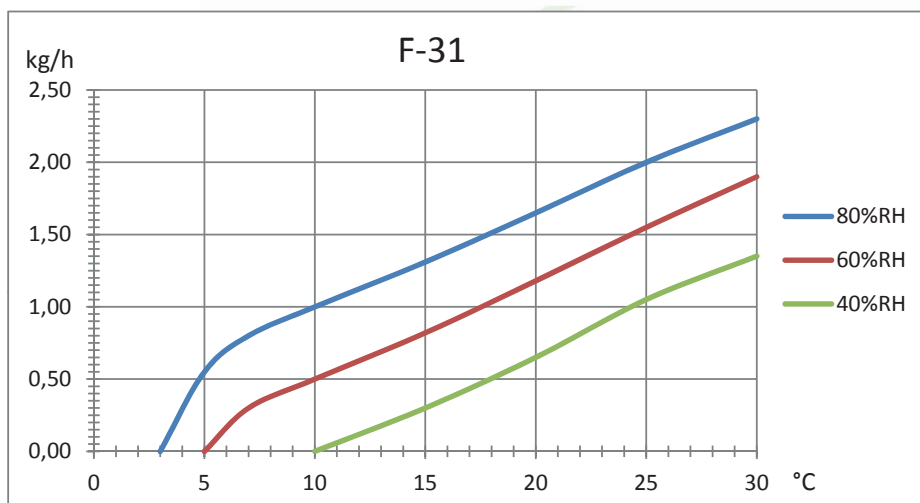

DIMENSIONS

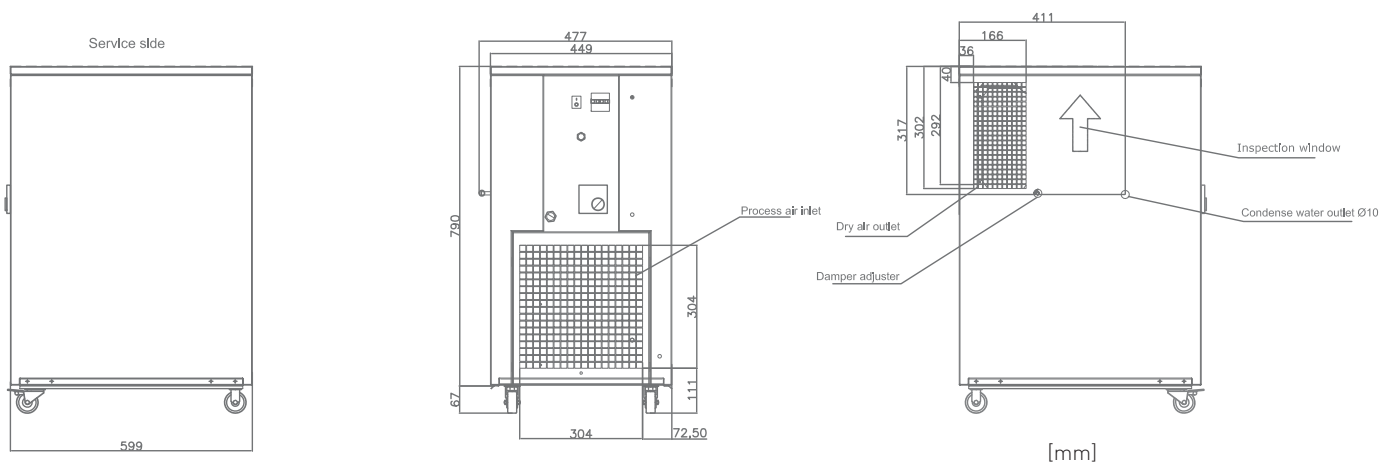

Subject to change without notice. Download installation drawing at www.dst-sg.com

Seibu Giken DST AB

Avestagatan 33 | SE-163 53 Spånga, Sweden

Tel +46 8 445 77 20 | Fax +46 8 445 77 39

www.dst-sg.com | info@dst-sg.com