

Dehumidifier Recusorb


# RZ-81/101/102, RLZ-82/104



Dehumidifying capacity at 20°C / 60%RH  
**19 - 65 kg/h**


Dry air flow  
**2800 - 10500 m<sup>3</sup>/h**

- Washable rotor
- No desiccant carry-over
- Ideal for storage applications
- Built-in heat recovery
- Low dry air temperature
- Long lifetime

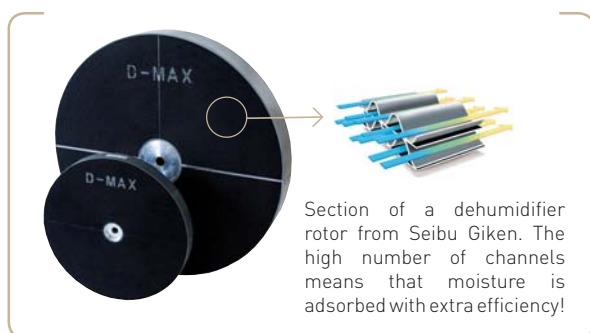


TECHNICAL DATA

Dehumidifier model	RZ-81	RLZ-82	RZ-101	RZ-102	RLZ-104
Nominal capacity <sup>1</sup> (kg/h)	19	25	30	50	65
Dry air flow <sup>2</sup> (m <sup>3</sup> /h)	2800	3500	4500	7000	10500
Static pressure at disposal (Pa)	400	300	400	400	400
Wet air flow <sup>2</sup> (m <sup>3</sup> /h)	1000	1000	1800	2500	2500
Static pressure at disposal (Pa)	200	200	200	200	200
Heater power <sup>3</sup> (kW)	24	30	30	63	80
Maximum electric consumption (kW)	27	34	44	72	92
Supply fuse 3x 230/400V 50Hz (A)	80 / 50	125/63	125 / 80	250 / 125	- / 200
Weight (kg)	294	558	380	503	558

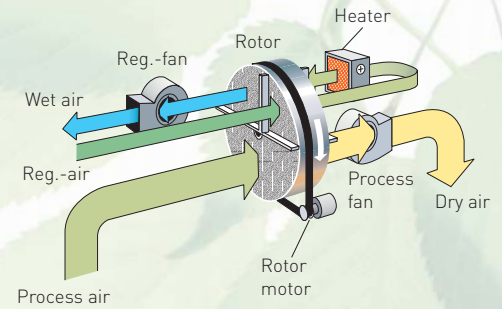


<sup>1</sup> Valid for inlet conditions 20°C/60%RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.  
<sup>2</sup> Volume flow for density 1.20 kg/m<sup>3</sup>.  
<sup>3</sup> Available with electric heater, steam heater or gas heater

CORRECTION DIAGRAM

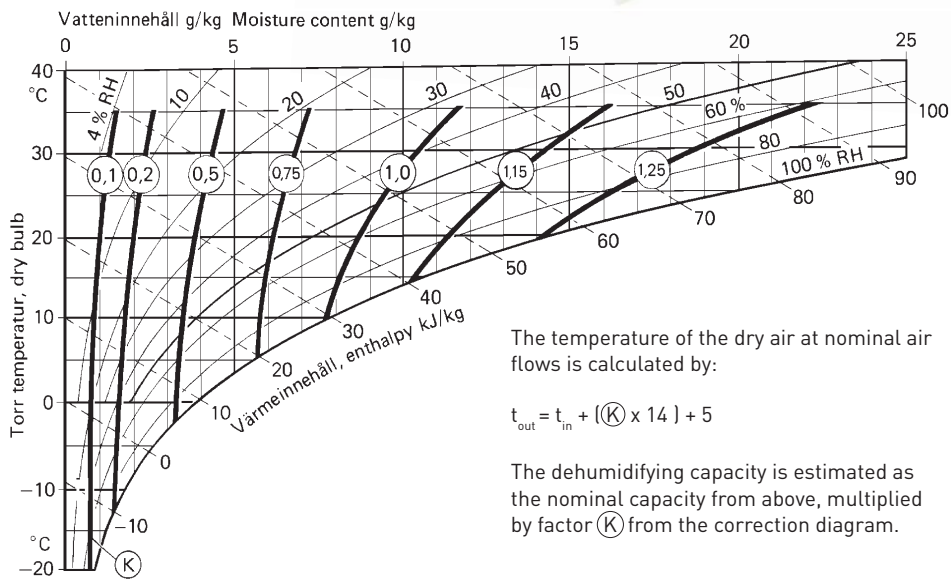

DIMENSIONS

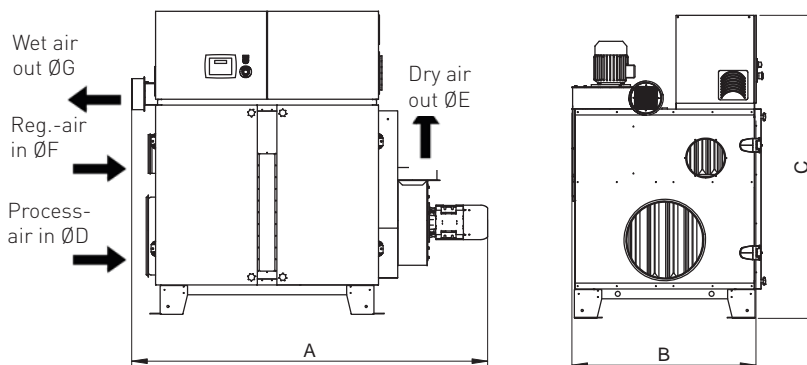

Dimensions RZ [mm]					
RZ-	81	RLZ-82	101	102	RLZ-104
A	1800	2007	2100	2200	2390
B	950	950	1340	1250	1260
C	1550	1550	1850	1940	2140
D	400	400	500	630	630
E	250	630 x 236	400	500	940x398
F	200	200	315	400	400
G	160	160	250	315	315

Subject to change without notice. Download installation drawing at [www.dst-sg.com](http://www.dst-sg.com)

Seibu Giken DST AB

Avestagatan 33 | SE-163 53 Spånga, Sweden

Tel +46 8 445 77 20 | Fax +46 8 445 77 39

[www.dst-sg.com](http://www.dst-sg.com) | [info@dst-sg.com](mailto:info@dst-sg.com)