


### Internal humidity variation

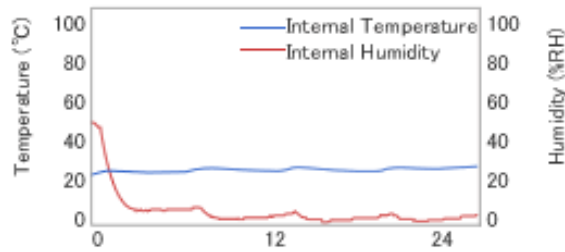

The variation of internal atmosphere within 24 hrs  
External atmosphere: 25°C, 50%RH

## Installed functions in O2 Series

### Automatic operation

The fans inside U-2000 dry units operate for 20 minutes to circulate the internal air for faster dehumidification at every door operation of open/close.

### U-2000 dry unit x 1

U-2000 is the latest model of our dry unit. The unit can operate automatically to maintain humidity constant. It is also specifically designed to avoid noise problems.

**The performance of O2 series is half of Hyper series.**

### Digital panel




Electrostatic type humidity sensor realizes accurate humidity display on the panel. Shift the temperature and humidity display easily by pushing one switch bottom on the panel only. Safety protect your materials from unexpected high humidity level with the new humidity alarm.


### Stainless shelves

Strong shelves with good endurance. The loading capacity is 100 kg at maximum.

### Reliable ESD Free Design - with EPA mark

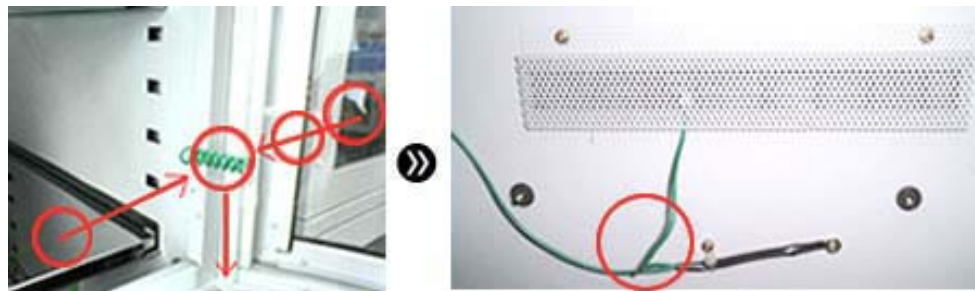

With the perfect ESD Free design, SUPER DRY has been proved to perfectly protect from the harmful ESD.

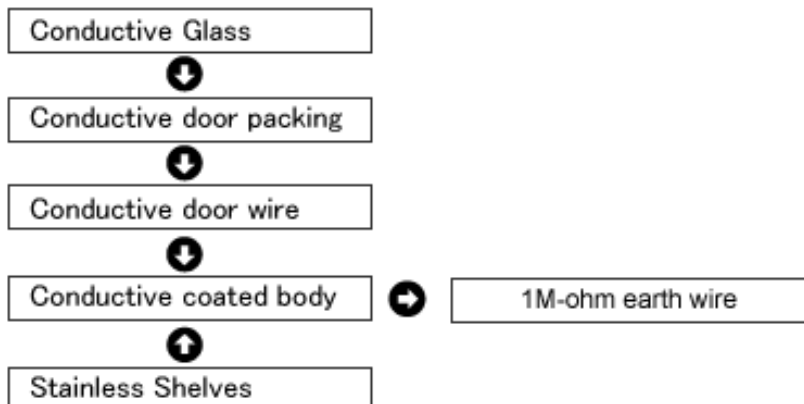

Note: EPA is a mark shows its surface resistance values which IEC 613405-01 demands.